

SIENALITE Recessed Downlight (Integrated)




White



IP20

Class II

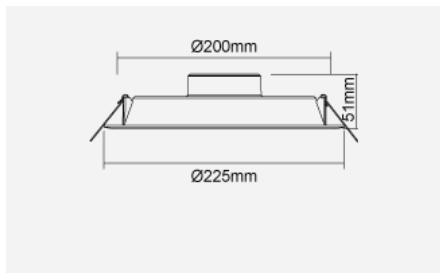

Product Code:

FDL70300v0

| Electrical Data | |
|--------------------------|---|
| Voltage (V) | 220-240V |
| Product Data | |
| Product Wattage (W) | 24 |
| Beam Angle (°) | 90 |
| Colour Temperature (K) | Warmwhite (3000K), Coolwhite (4000K), Daylight (6500K) |
| Colour Render Index (Ra) | Ra80 |
| Colour | White (WH12) |
| Protection Class | Class II |
| Dimmable | No |
| Operating Temperature | -30 ° C to +40 ° C |
| Application | Retail, Bathrooms, Hotels, Kitchens, Offices, Restaurants |
| Performance Data | |
| Luminous Flux (lm) | 1900 [3000K], 2000 [4000K/6500K] |
| Luminous Efficacy (lm/W) | 79 [3000K], 83 [4000K/6500K] |
| Rated Life (hrs) | 25000 |
| IP Rating | IP20 |
| Product Dimensions | |
| Diameter (mm) | 225 |
| Height (mm) | 51 |
| Cut-out (mm) | Ø200 |

Product Code: FDL70300v0

MEGAMAN® 2005-2018. All Rights Reserved.
This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

www.megaman.cc